

WELCOME AND CONTACT INFORMATION

We are pleased to welcome you to the **LEAP EAST**. This manual provides essential information to ensure a smooth and successful exhibition experience. For any queries, please contact:

Contact Information

Tahaluf Events Limited (an Informa Company) P.O. Box 13311/ Riyadh, KSA	
Customer Service	Technical Department for space only stands plan approvals
Email: LeapeastCS@tahaluf.com	techleapeast@tahaluf.com
Whatsapp: +966555953750	
CS Hotline: +966115101913	
Operating hours from Sun - Thu 9:00AM - 5:00PM (KSA Time)	
FOR SHOW TEAM CONTACT DETAILS, REFER TO THE MAIN WEBSITE: https://leapeast.com/	

STAND CONSTRUCTION & MANAGEMENT

When an exhibitor appoints an outside contractor to build / modify their stand or an exhibitor builds their stand by themselves (if an exhibitor is building their own stand, they are considered as an outside contractor during the move-in/out period), both the exhibitor and contractor must fully understand following information and regulations. Exhibitors and contractors are expected to comply with any building regulations, all government rules and regulations, and regulations laid down by the organiser.

Exhibitors should submit their stand contractor details to [LEAP East 2026 - Nominated Contractor](#). If an exhibitor is building their own stand, they are also required to register themselves.

The official contractor, Pico, will issue each exhibitor an individual username and password for Pico Concierge (<https://concierge.pico.com/exhibitor/es/LEAFEAST26>). Exhibitors or their appointed stand contractors can upload design drawings and place orders through Pico Concierge.

Any violations on any of the below regulations will subject to contractor deposit being deducted, and/or result in prohibition to work on our future shows. (For deduction details please refer to "Deduction Scheme")

HEALTH & SAFETY

Health & Safety is our primary concern. All contractors shall study the information in section Health & Safety, let's work together to keep our event safe.

FORMS SUBMISSION CHECKLIST & PROCEDURES

Step	Action	Materials / Order Form / Link	Deadline
Step 1	Exhibitor submit contractor's details.	LEAP East 2026 - Nominated Contractor	20 May 2026
Step 2	Exhibitors will receive an automated email containing their login username and password, issued by Concierge Notification.	Pico Concierge	
Step 3	Exhibitors or appointed contractors can upload design drawings and place orders on Pico Concierge.	Pico Concierge	5 June, 2026
Step 4	If exhibitors or appointed contractors are unable to submit booth design plan and place order, email submissions are also accepted.	Hall 1: cs_leapeasth1@pico.com Hall 3: cs_leapeasth3@pico.com	
Step 5	Pico will provide comments regarding the booth design plan.		

Step 6	Submission of RSE (if applicable), FS251 & WR1 to Pico onsite service counter.	RSE (Section F19.2) FS251 (Section F19.6) WR1 (Section F14)	7 July, on or before 13:00
- It takes 20 working days for commenting on the stand design plans. Please submit all the above items to Official Contractor before deadline. - Any late submission of each of the above items will be subject to a surcharge of HKD3,000. - The stand design plan will not be commented if any of the above items has not been submitted. - Contractors will not be admitted into halls if either one of the above items has not been submitted or if the stand design plans for such work have not been received and commented on.			

CLEANING & GARBAGE DISPOSAL

The Organisers will arrange for the general cleaning of the exhibition halls and stands, prior to the opening of the Exhibition and daily thereafter. The Exhibition Centre will also provide general cleaning during show period. In case of the need for urgent cleaning, exhibitors may call the cleaning service hotline for aid: (852) 2582 7007.

All disposal of waste stand construction materials etc during the move-in and move-out periods is the responsibility of individual stand contractors concerned. Disposal of contractor's waste materials by the Organiser or venue will result in the contractor's deposit being forfeited.

In the case of 'shell scheme' exhibitors bring in shelving and stand fittings, these cannot be left behind at the close of the show. It is the exhibitor's responsibility to dismantle all stand fixtures built or brought in by themselves and remove all waste materials from the Centre at the end of the show. Failure to comply will result in a charge for HK\$5,000 for the labour and trucking required to dispose of the material.

To facilitate traffic flow at the loading dock during move-out, any space only contractor wishing to remove construction materials or waste by Grabber Truck must engage this services to the Official Contractors - Pico. Grabber Truck operated by space only contractors are strictly prohibited. For safety reasons, booths must be fully dismantled prior to the use of Grabber Truck for material clearance.

COMPRESSED AIR/ PRESSURIZED CONTAINERS

No air compressors or pressurized containers may be used within the exhibition halls. For the supply of compressed air, please contact the Official Stand Contractor, directly for quotation.

CONTRACTOR DAMAGE & PERFORMANCE DEPOSIT

It is in your best interests to appoint a capable and professional stand contractor, who fully understand the requirements we have set out pre-show and on-site. All contractors are required to lodge a damage / performance deposit pre-show with the Official Stand Contractor, and in the event of breaches of the guidelines, deductions (or forfeit) of this deposit will apply. For the majority of stand contractors who operate in a professional manner this will not be a concern. Access to the site will not be permitted until this deposit has been paid.

Performance bond obligations are calculated according to the total area of the stand. The fee structure is as follows:

- 18–48 Sqm: HKD30,000
- 49–100 Sqm: HKD50,000
- Above 101 Sqm: HKD100,000

Exhibitors are again reminded that they are legally liable for their contractors. **Exhibitors should aware this is the contractor's performance deposit.** When the contractor violates the regulations, the deposit will be at risk of being deducted. Please understand the details before paying the performance deposit on your behalf.

It is the individual stand contractor's responsibility to remove all packing and waste materials from the exhibition centre during both move-in and move-out. Garbage & waste materials from decoration work must not be discarded into the aisles & must be cleared daily. All material used must be removed during move-out and this must be done safely (no pushing over of high pieces of stand, no smashing of glass panels etc). Failure to comply will result in the contractor deposit being totally forfeited. (The Organisers will take photos as a record).

CONTRACTOR "GREEN CARD" REQUIREMENT / SECURITY WRISTBANDS / CONTRACTOR ENTRANCE

Local stand contractors entering the Centre for construction **must** obtain the Construction Industry Safety Training Certificate ("Green Card") prior to working in Hong Kong. For more information, please visit www.labour.gov.hk/eng/osh/mbstcw.htm. The Green Card system is a joint initiative of HKCEC, Asia World Expo (AWE), supported by the Hong Kong Labour Department and endorsed by the HKCEIA.

Due to increased security measures these are compulsory for external contractors working in the halls during build-up and breakdown. Upon contractors entering the Exhibition Centre, a wristband will be given by the HKCEC security guards after presenting a valid contractor pass and contractor green card. The wristband is colour-coded and will be given out each morning. All contractors are required to wear this wristband during build-up and breakdown.

Procedure:

1. Contractor Entrances/Checkpoints are located in the front of Freight lift E6, LG1, the Loading Area of Phase 1, and the corridor next to S7-10 lift lobby, LG, Phase 2. (see below)
2. Stand contractors / transportation drivers/workers are required to produce valid identification (i.e. green card and contractor pass) at the Contractor Checkpoint to obtain a wristband. Wristbands will NOT be distributed at any other entry points.
3. After obtaining wristbands for the day, contractors and workers may re-enter HKCEC via other entry points during the same day.
4. Security guards will conduct regular patrols in the venue and other areas to ensure the policy is being correctly observed.
5. Stand contractors, other transportation drivers/workers without a valid wristband will be asked to leave the venue at once.
6. Only stand building contractors with a valid wristband are permitted to carry out stand building work.
7. Should a wristband be lost or damaged, the identification of the relevant stand contractor must be re-verified at one of the Contractor Checkpoints. A security guard will record the person's information and re-issue the wristband. Repeat losses will not be accepted.

承建商/技術員請依照以下路線圖進入會展中心 Please follow the route marked on the map to access the HKCEC.

會展中心一期
Phase I of HKCEC



會展中心二期
Phase II of HKCEC



Overseas Contractors entering the HKCEC for construction works must apply for a "TEMPORARY WORKING VISA/PERMIT"

According to HK Immigration ordinance, all mainland China and foreign contractors entering the HKCEC for construction works need to obtain a work visa before commencing any construction work in Hong Kong. The applicant has to submit form 990A or 990B to Immigration department. Overseas contractors can download the application form at http://www.immd.gov.hk/ehhtml/public_7.htm.

*Exhibitors should comply with Hong Kong Occupational Health and Safety Ordinance Cap. 509 for the responsibilities of industry stakeholders www.labour.gov.hk/eng/legislat/content4.htm when hiring overseas working inside the Venues.

CONTRACTOR BADGES

Contractor Badges - Due to the increased security measures, these are compulsory for all outside contractors working in the exhibition halls during move-in and move-out. It is a must to submit contractor insurance, damage & performance bond, and stand design drawing, risk assessment, method statement-before collect the badges.


	Contractor Badge		Contractor Vehicle Pass	
Stand Size	Move-in/out	Show Day	Move-in	Move-out
Below 9sqm	3	1	1	1

10 – 18sqm	5	1	2	2
19 – 24sqm	8	2	2	2
25 – 36sqm	10	3	3	3
37 – 60sqm	12	4	3	3
61 – 78sqm	24	5	4	4
79 – 120sqm	28	6	5	5
121 – 200sqm	34	7	6	6
201 -300sqm	40	7	7	7
Above 300sqm	48	8	8	8

CONTRACTOR VEHICLE PASSES

Vehicle passes are not parking permit. All vehicle/ trucks must leave the loading area after delivery or collection. HKCEC will impose charges for vehicles with extended stay within the HKCEC loading area during move-in & move-out days.

Please note vehicle going to HKCEC must use the "GO HKCEC" mobile app to enter the HKCEC loading areas. Entry with using a physical pass will not be accepted.

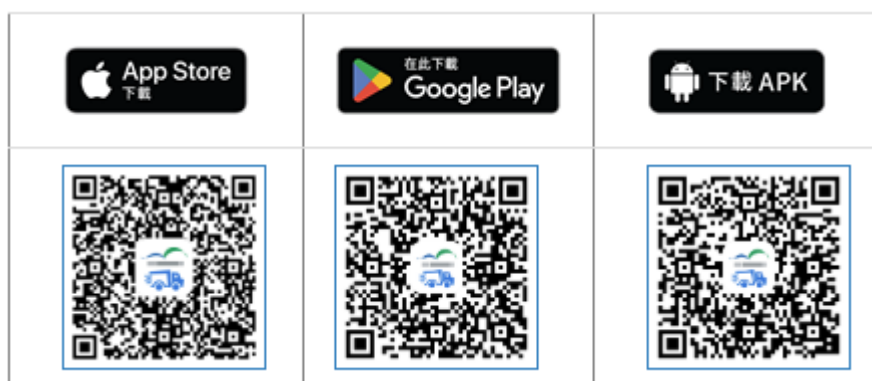

User guide on youtube: <https://youtu.be/4p00gv9hQgs> (ENG)

<https://youtu.be/pgphCJWVsQ> (CHI)

Mobile App Hotline: +852 2582 7130

CONTRACTOR'S ALL RISK INSURANCE

Each Individual Stand Contractors are required to take out and maintain public liability insurance in respect of the Individual Stand Contractor's liability for death or injury to any person, or loss or damage to property arising out of the performance of the Services in a sum not less than HK\$16 million (US\$2 million) for any single claim, unlimited in aggregate. In addition, an Individual Stand Contractor shall take out and maintain valid and adequate insurance cover against theft, fire, damage to property, accidents, natural calamities, acts of God and such other risks normally insured against by a reasonable person in the position of the Individual Stand Contractor, or as Tahaluf may require, in connection with, inter alia, the Individual Stand Contractor's property (including all equipment, fittings, furniture, materials and other facilities used or provided by the Individual Stand Contractor in the performance of the Services) and the performance of the Services. The insurance shall be maintained in force at all times during the Move-in/out and Exhibition Period.

Each Individual Stand Contractor **MUST HAVE** valid and adequate insurance cover of no less than HK\$16 million (US\$2 million) against public liability for the entire move-in and out period (5 - 11 July).

Outside contractors shall provide an insurance policy to the Official Contractor on or before 12 June, 2026 or HK\$3,000 late surcharge will be imposed. The Organisers reserve the right to refuse access to Stand Contractors that fail to do so.

Below is the information that must include on your certificate of insurance:

Contractor's All Risk Insurance

Insured:	XXXX (name of exhibitor) as principal and/or XXX (name of contracting company or its subcontracting company) as contractors
Additional Insured:	LEAP EAST (Tahaluf) as Show Organiser and/or Hong Kong Convention & Exhibition Centre (Management) Ltd. as Landlord
Insurance Period:	From 5 - 11 July 2026 (both dates inclusive)
Insured Limit of Indemnity:	HKD16,000,000 anyone occurrence & unlimited during the Period of Insurance
Territorial Limit:	Within Hong Kong Convention and Exhibition Centre
Jurisdiction Limit:	Hong Kong SAR (or World-wide)
Condition:	Cross Liability Clause

Willis Hong Kong Ltd can provide service for arranging Contractor's All Risks insurance coverage. Please contact:

Mr Timmy Chung / Ms Maggie Leung

Tel: +852 2195 5812 / 2195 5808

Fax: +852 2195 5600

Email: timmy.chung@willistowerswatson.com / maggie.leung@willistowerswatson.com

ELECTRICAL INSTALLATIONS

For safety reasons, water link-ups, compressed air and ALL electrical installation work MUST be carried out ONLY by the Official Stand Contractor. All electricians working in the exhibition hall must be registered (Form WR1) and they must comply with the Hong Kong Government Electricity Ordinance. The employer of the electrician shall be liable for any damages caused if the electrician fails to comply with above requirement.

For Shell Stand exhibitors, power sockets will be provided by the Organisers, built by the Official Contractor, please refer to "Shell Stands Specifications" for number of sockets provided).

No other contractors will be permitted to undertake electrical work in the Exhibition Centre. If the actual power consumption of any Exhibitor exceeds the applied limit and affects the operation of other exhibitors or the power supply system of the venue, the Organisers will stop power supply to their stands immediately and the Exhibitor will be liable for the damage caused.

In the case of light box displays brought in by Exhibitors, each fluorescent or lamp used will be treated as general lighting and charged as per an additional order. Please refer to Form 4b or 4c for electrical orders.

Exhibitors requiring special arrangements (e.g. different voltages and frequency or connections to equipment) must arrange for their own transformers, converters, etc., or hire from the Official Stand Contractor.

In the event of limited electricity supply in the hall, the Organisers may have to ration power supply. Exhibitors are advised to bring along UPS as back up support for their exhibits.

Before lighting and electricity are supplied for individual stands, exhibitors who need a prior arrangement for electricity supply testing should contact the Official Stand Contractor. Such supply is subject to extra cost and technical availability.

Use of multi-plugs or extension cords is not allowed in the exhibition halls.

No flashing / blinking lights or neon lights will be permitted.

The Organisers reserve the right to disconnect electricity supply to any Exhibitor whose installations are violating the Organisers' regulations, dangerous or likely to cause annoyance to visitors or other exhibitors.

For Shell Stand Modification:

If Shell Stand Exhibitor would like to modify the shell stand to special design, electricity ordered for construction MUST be required.

Please note that the 500W Socket (Square Pin) provided in the Shell Stand is NOT for any kind of lighting connections. Any additional lighting needs to order lighting connections (Return Forms 4b).

Besides, all the shell stand facilities (except electrical facilities like socket, spotlight) could be kept back in the stand, however, exhibitor/contractor must inform the official contractor 10 working days before move in. Otherwise, it will be subject to 30% surcharge on the basis rates.

GANGWAYS & FLOORING

During the process of installation, construction and removal of stands, the gangways must not be used at any time for the storage of plants, materials or debris of any kind. The organisers may at their discretion order the removal of such objects and the exhibitors/contractors will be liable for the cost of removal.

Please refer to the Health & Safety Section for details.

All "Raw Space" stand must lay carpet / wood flooring and install back walls against any adjoining stands. Carpet must be affixed with double-sided tapes. These tapes are to be removed during the move-out period by the exhibitor's own contractor.

HANGING BANNERS / STRUCTURES / STAND SUPPORTING POINTS

There is a charge levied on hanging of banners / structure from the ceiling of the exhibition hall above exhibitor's stand. (Refer to Form 6b).

Banner

Banners are restricted to two-dimensional signs only and maximum weight is 20kg (total weight including banner, accessories - wires, iron rods and s-hooks, etc) and must be hung over stand space.

Max. banner size in Hall 1A-E and 3B-E is 3m(W) x 4m(H), with at least 5.5m away from ground.

No banners are allowed to be hung without the Organiser's prior approval. Due to the irregular layout of fixed hanging points, please contact the Official Stand Contractor for location details.

HKCEC will weight the banners prior to hanging and has the right to reject any banner onsite if found to exceed the weight limit. In case a banner cannot be hung according to the schedule below, all extra costs incurred such as equipment rental, will be charged back to the exhibitors/contractors involved.

Official Stand Contractor will act as the coordinator to collect all banners for hanging, all outside contractor involved must be presented during the entire hanging period to provide immediate assistance. Outside contractors should also prepare sufficient accessories in advance (banners need to be fixed with wire, pipes and all necessary accessories) and please contact the corresponding person-in-charge directly to ensure on-site assistance is available.

All banners must be hung on the time/date below, prior stand build-up. Should exhibitors/outside contractors require late hanging or relocating banners, this depends on on-site circumstances and all extra costs incurred such as equipment rental, will be charged back to the contractor(s) / exhibitor(s) involved.

Banner and Accessories Requirement (Below example, with banner at 3x3mH):



** bottom of banner must be at least 5500mm from ground.

Structure

For hanging of non-PVC banner, banner to be hung on metal truss or in 3-dimensional format of structure, please send your request together with booth design with dimension to the official contractor - Pico for separate quotation and regulations, height from ground should be same as banner. No banners/structures are allowed to be hung without the Organisers' prior approval.

Stand Supporting Points

No suspensions may be made from the ceiling of the exhibition hall as part of the stand design. All structures must built from ground and should be able to stand

alone without the use of hanging points. However, If supporting (rigging) points from the exhibition hall ceiling are required for stands over 2.5m, please contact the official stand contractor directly for quotation.

LOADING AND UNLOADING OVERTIME CHARGE

Loading Area is for loading / unloading of cargoes & exhibits. No parking will be allowed in the loading area at all times. Nevertheless, private vehicles are not permitted to enter the loading area.

HKCEC imposes charges on delivery and pick-up vehicles with extended stay on move in/out period.

Charges:

First 60 mins (Free Period)	Free
First 2 hours after 60 mins	HKD100 / every 30 mins or part thereof
After 3 hours	HKD150 / every 30 mins or part thereof

Payment Method: Octopus and Credit Card Only

MOVE-OUT INSTRUCTIONS

1. For security reason, only limited entrance gate will be opened for non-official contractors during move in and move out.
2. Outside contractors should strictly follow the move-in/out schedule. Early move-in without Organiser's prior consent is not allowed. Otherwise, all workers and construction materials will be required to leave the hall immediately and all site work deposit will be deducted.
3. Construction materials are subject to random check during move-in and move-out.
4. During dismantling period, all materials must be kept within the stand area until they are ready to be loaded into the trucks.
5. Contractors should dismantle the stand in a proper and safe manner. Any components should be laid down gently while dismantling. If the dismantling process does not comply with the safety standard or the materials are fiercely pulled down, the Organiser and Official Contractor reserve the right to stop the process and all site-work deposit will be fully deducted.

6. Anyone admitted to exhibition hall(s) during move-in/out period must wear Reflective Safety Vest and proper PPE. Effective from 1 June 2019, all contractors must wear reflective vests. Violators will be asked to leave the venue immediately.
7. If the non-official contractors do not dismantle or remove the stand materials/ waste after the above move-out period, all site-work deposit will be deducted. If the deposit is not enough to cover the over-time charges, the organiser reserves the right to charge the contractor for the outstanding balance.
8. Due to the space constraint and frequent damages made at Phase II marshalling entrance at loading bay, entry of 45' Container will not be allowed.

Please [click here](#) for details of the move-out definition of HKCEC.

NAILING / DRILLING / PAINTING / USE OF ADHESIVE MATERIALS

Lamination of graphics (wall papering) directly on the system panels, using screws, nails, painting, double-sided adhesive tape or fixtures of any kind that will cause damage to the panel walls, floor, ceiling or any hall/stand structure is strictly prohibited. Exhibitors are responsible for removing the laminated graphics and restore the panel system at the close of the show. A restoration fee of HK\$2,000 will be charged to exhibitors for damage to panel walls.

Should exhibitors require fixing poster / foamboard on the ready stand panels, only Velcro may be used and this must be removed completely when the show is finished.

RIGGING

Rigging is only permitted above your space only stand and must comply with minimum 5.5mH, from ground to the highest element of the structure. Should you wish to have a hanging structure with your company logo or company graphics, be advised that an additional branding fee will apply depending on the size of the banner / structure and number of sides. On receipt of the stand design, the Organisers will advise on the branding fees. Approval by the Organisers is required prior to placing rigging orders.

Any rigging found onsite unapproved will have a penalty or removal of rigging whichever the organiser sees viable to the situation.

Note: Rigging will be approved on a case-to-case basis, due to the location of your stand.

SERVICE TRENCHES IN THE EXHIBITION HALLS

All services at the Hong Kong Convention & Exhibition Centre are pulled through venue service trenches, including telephone lines, electrical, water & waste and compressed air.

If exhibitor intends to order a high level of services, we recommend laying a platform on the hall floor to hide unsightly pipe work and cables. This also gives greater flexibility in where the services are pulled through. It can be ordered a platform from the Official Stand Contractor.

STAND BUILDING HEIGHTS LIMIT & VENUE SPECIFICATIONS

Location	Max. Stand Building Height (Raw Space)	Max. Stand Building Height (Unified Shell Stand)	Max. Stand Building Height If under and within +/- 0.5m of Smoke Curtain	Ceiling Height	Floor loading Limit
Hall 1ABC	4m	2.44m	3m	10.5m	1,700kg/sqm
Hall 1DE	4m	2.44m	3m	10.5m	1,250kg/sqm
Hall 3BC	4m	2.44m	3m	10.5m	1,700kg/sqm
Hall 3DE	4m	2.44m	3m	10.5m	1,250kg/sqm

STAND DESIGN - DRAWINGS SUBMISSION

a. The contractor should submit the details of stand plans to the Official Contractor before the deadline.

b. All stand design plans must conform to all statutory requirements and those set out in this Manual and must include the following:

- Plan view, clearly showing all dimensions, walling and fascia name.
- Elevation views clearly showing all dimensions, graphics, etc.
- Structural calculations/drawings proving structural stability, weight loadings, etc.
- Details of materials and fire protection.

c. The stands must be safely erected and dismantled and removed within the available move-in/out times.

d. No changes or amendments will be allowed after the stand plan is submitted or commented, unless prior written approval is obtained from the Organiser.

e. Exhibitors who opt for **Raw Space** will be given exhibition floor space only. No carpeting, wall partitions, basic furniture will be provided. Where a “Special Design / Raw Space” stand is located adjacent to “Shell” stand, the wall of the “Shell” stand is considered rented by that exhibitor and may not be utilised by the “Special Design / Raw Space” stand.

f. Exhibitors who opt for **Unified Shell Stand** will be given basic furniture. All package stands must be constructed by the official contractor. No additional stand-fittings or displays may be attached to the shell stand structure. Otherwise, the exhibitor shall be fully liable for any loss incurred for any case of accidents howsoever arising, and will need to compensate for the damage incurred, if any.

g. Better Stands Requirement

The Better Stands Program is an industry wide campaign aimed to unite exhibitors, contractors and the wider events industry together to move away from disposable, single use booths at our events, in favor of reusable structures. We believe that by eradicating disposable booths we will improve the ease, safety and sustainability of the exhibitor's experience at our events.

Starting from 2023, we will implement the following sustainability requirements of the raw space booths:

- 100% reuse of booth structure and walls
- 100% reuse of floor platform
- 100% reuse of furniture and equipment
- 100% reuse of lightings

All raw space stand must demonstrate evidence at both the design concept and build methodology that your stand core structure materials and furniture are reusable or recyclable in the below four main categories. Please clearly mark on the stand design layout (please [click here](#) to view the example).

- Stand structure and walls: structure or framework of the stand, walls, panels for meeting rooms, backdrop.
- Floor Platform: structure and flooring (excluding carpet).
- Furniture and Equipment: Showcases, counters, chairs, tables, sofa, coffee table, cabinet, flyer stand, LED walls, TV, AV equipment and etc.
- Lighting: all kinds of lighting in the stand and showcases.

All the raw space stand design layout plan will be vetted by Official Contractor whether they are met the Better Stands Requirement.

On the move-out day, all the reusable materials must be dismantled and wrapped

properly by the non-official contractors. otherwise, site-work deposit may be deducted.

Official contractor provides Better stands options for exhibitors with raw space stands. If the exhibitor is interested, please contact the Official Contractor directly.

Design Submission standard with detail construction drawing to follow:

1. Raw Space Stand
2. Unifined Shell Stand

STAND DESIGN - CEILINGS / COVERED OVERHEAD STRUCTURES

If your stand contains any ceiling cover, please comply with the following rules:

Full Partially Hard Cover Ceiling Stand

- Complete or partially hard ceiling cover is prohibited in the venue.
- If solid materials are installed that cover part of the ceiling, whether for decorative or support purposes, the solid materials must be no wider than 0.1m each at their widest point and spaced a minimum of 1m apart.

Fabric Cover Ceiling Stand

- Maximum 100 sqm in total covered area
- Minimum 600mm gap between each 100 sqm covered area
- Fabrics must be fire retardant and water-permeable
- Contractor or exhibitor are responsible to test the fabric on their own (including water permeable and fire retardant) and submit relevant proof or document (e.g. FS251 Certificate) on or before exhibitor move in day.

****Safety certificate should be provided on or before last move in day including but not limited to RSE Certificate & FS251**

HKCEC has sole right to prohibit any parties from constructing covered stands and structures with Hong Kong Convention and Exhibition Centre if the above terms & conditions are violated.

STAND DESIGN - PLATFORMS AND STAGES

Platform and stage installations for public use may require suitable handrails. Other means of protection must be provided on any riser type platform that exceeds 1 metre in height.

Use of any platforms or stages more than 1.1 metres but lower than 1.5 metres in height must be constructed under the supervision of an Authorised Person /

Registered Structural Engineer (RSE). The Authorised Person / RSE must also verify the stability of the platforms and stages on-site and submit a safety report to the Official Contractor during move-in period.

No stage or platform 1.5 metres in height or above may be erected unless a RSE has verified their structural calculations and design for stability prior to set-up or erection. The Authorised Person/RSE must also verify the stability of the platforms and stages on-site and submit a safety report to the Official Contractor during move-in period.

STAND DESIGN - SIGNAGE / ADVERTISING

No part of any stand/exhibit/advertising, including fascia, signs (and/or projection images), lighting, corner posts, etc. shall project into or over the gangway or obscure any fire or exit signs and the Organisers reserve the right to remove any such item(s).

If any part of a stand is built above 2.44m, this must not adversely affect adjacent exhibitors; any decoration including wordings, logos, company name etc. must be set back at least 1m from adjacent stands.

Wall panels (back and side walls) built above 2.44mH and overlooking neighboring stands, must be “finished” in white panel and must not carry any graphics or wordings. The Organiser has the right to authorize dismantling or rebuilding of any stand which does not meet this regulation.

Inflammable, explosive, radioactive and poisonous articles are not allowed to be stored, used and displayed in the exhibition halls.

*Subject to approval by the organiser

STAND DESIGN - SOLID WALLS & REAR SURFACE

Solid Wall

In accordance with Tahaluf blockage rules, only 50% of each open side of your stand may be blocked. This rule is to avoid interfering with the overall view of the halls, blocking neighboring stands or hindering normal visitor traffic to a stand. Exhibits and walling should be positioned in such a way as not to obstruct the view of the exhibition or adjacent stands. The Organisers reserve the right to refuse any designs, or request amendments to designs, which in their opinion have a detrimental effect to neighboring exhibitors or overall look of the exhibition.

“Ground Support structures shall be designed and constructed to be fully self-supporting. No stand structure can be attached to venue ceiling as a precautionary or additional safety measure.”

Rear Surface

Contractors must have any exposed stand surfaces neatly finished unless the surface is facing the outer wall of the exhibition center. The Organisers reserve the right to order modifications of any exposed surface, and the contractor shall be responsible for the cost. Covering by cloth is strictly not allowed on any exposed stand surfaces.

If any part of a stand is built above 2.44m this must not adversely affect adjacent exhibitors; any decoration including wordings, logos, company name etc. must be set back at least 1m from adjacent stands. Panels that are facing adjacent exhibitors must be white.

STAND DESIGN - STAND MATERIALS

As per the Exhibition Centre Rules & Regulations, all drapes, curtains, fabrics, signs, fascia, decorative materials night sheets, backdrops, banners, coverings, plastics, skirts, carpet flooring and all other materials used in the construction and decoration of Stands, Temporary Structures or other Scheduled Exhibition installations or components, must be non-combustible, inherently non-flammable or durably flameproof and may be inspected by authorised personnel or the Hong Kong Government to verify compliance.

All artificial plants used in the stand design features must be fire-resistant.

Outside stand contractors **must present** the relevant documentation along with Form FS251 relating to fire tests, flame tests, fume tests, and other similar tests to the Official Stand Contractor during move-in days. Failure to comply will result in your contractor damage / performance deposit being deducted.

You may refer to [Fire Services Department](#) whom may issue Form FS251 on this regard.